SPONGES AND ACCESSORIES

APPLICATION

CLEANING

CLEANING AND

ABRASION

Spreader

Rubber spreader for Fugalite® application.

• Guarantees complete filling of the gap



Natural cellulose sponge with support plate for handle

- Powerful cleaning
- Stays clean for longer



White abrasive felt pad with support plate for handle and felt pad.

Effective mechanical action

Foam rubber sponge

Fine pore foam rubber sponge with support plate for handle.

Ideal for extrafine finishing



FUGALITE®

THE RANGE OF PATENTED WATERPROOF, STAIN-PROOF GROUTS.

FUGALITE® BIO, the innovative, hypoallergenic, silk-effect, water-based resin.

FUGALITE® BIO PARQUET, specific for wood-effect grouting of ceramic parquet.

FUGALITE®, liquid ceramic for the smooth, unbroken grouting of all ceramic and glass mosaic coverings.

FUGALITE® INVISIBILE, liquid glass for photochromatic effect laying and grouting of glass mosaic.

YOUR TRUSTED RESELLER:



info@kerakoll.com www.kerakoll.com

Cleaning Kit **FUGALITE®**



KERA COLI

The GreenBuilding Company

DETERGENTS AND CLEANERS

Fuga-Wash Eco

Eco-friendly detergent to be used as an additive in water used to clean Fugalite®.

- Facilitates cleaning of covering materials
- Keeps the sponge cleaner

Fuga-Soap Eco

Eco-friendly detergent to remove stains of Fugalite®.

- Ideal for cleaning after fixing
- Suitable for all surfaces



Fuga-Shock Eco

Eco-friendly cleaner, ready to use, for removing residues and streaks of epoxy resins.

- Highly effective
- Floors and walls
























Cleaning Kit FUGALITE®

Professional tools for perfect cleaning of grouted surfaces with Fugalite®

PREPARATION



First cleaning with rubber spreader


once the joints have been filled, remove any excess grout that is left on the tiles immediately with the rubber spreader (working diagonally).



Addition of Fuga-Wash Eco to the cleaning water

Recommended dosage: 1 measuring cap for every 5 litres of water. Use the wash-boy ① to carry out the first cleaning pass with a cellulose sponge or abrasive felt pad, removing any excess grout from the flooring. Use wash-boy ② to carry out the second and final cleaning pass, finishing and smoothing the grout in the joint. Change the washing water frequently so that it is always clean. Replace the sponge or felt pad if they become impregnated with product.



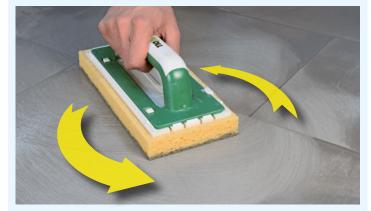

Cleaning with cellulose sponge

Clean when the grout is still fresh, using a cellulose sponge dampened with the water from wash-boy ①. Use circular movements to soften the film of grout on the tiles and finish the joints. Collect up the emulsion formed on the tiles using the sponge.



Cleaning with abrasive felt pad for structured surfaces

For more structured surfaces, clean when the grout is still fresh, using a felt pad dampened with the water from wash-boy ①.

Use circular movements to soften the film of grout on the tiles and finish the joints. Collect up the emulsion formed on the tiles using the sponge.

SECOND PASS



Finishing with a cellulose sponge

Finish cleaning with a cellulose sponge dampened with water from wash-boy ②, working diagonally to the tiles so as not to dig into the joints. Do not walk on the damp floors for at least 12 - 24 hours, to avoid leaving dirt.



Finishing with foam rubber sponge for a smoother joint

For a smooth finish, complete cleaning with a foam rubber sponge dampened with water from wash-boy ②, working diagonally to the tiles so as not to dig into the joints.

THE FOLLOWING DAY



the curing time for Fugalite®. Recommended dosage: 2 - 3 parts water to 1 part Fuga-Soap Eco on the day after; undiluted after 3 days.





Collect up the detergent solution with the sponge, rubber scraper or liquid vacuum system for large surfaces. Rinse thoroughly with clean water.



Dry immediately with a dry cloth or liquid vacuum system, without allowing the residual water to evaporate.

Repeat for highly stubborn dirt.

SPECIAL CLEANING



When the grout has hardened (after at least 7 days), any residue and streaks can be removed using Fuga-Shock Eco. Distribute the product undiluted over the surface to be treated, using the abrasive felt pad. Leave Fuga-Shock Eco to act for approximately 3 - 5 minutes, then carry out the same rinsing and drying operations indicated for cleaning on the day after application.