


Flowtech Easy

Rapid self-levelling product for the correction of substrates before laying ceramic tiles, marble and plywood parquet floors.

Flowtech Easy is ideal for applications with a smooth finish on absorbent and non-absorbent substrates. Guarantees maximum compatibility with all kinds of adhesives for laying ceramic tiles, natural stone and multi-layer parquet.

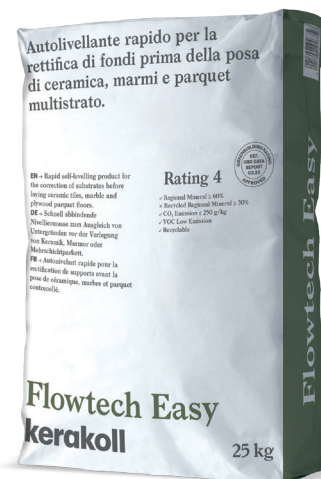

Rating 4

1. Thicknesses from 3 to 20 mm
2. Long self-levelling time, also suitable for large surface areas
3. Easy to apply also with plastering machines
4. Formulated with high-performance raw materials with low environmental impact
5. Suitable for laying ceramic tiles, porcelain tiles, natural stone, hardwood floors, multi-layer parquet.

- ✓ Regional Mineral $\geq 60\%$
- × Recycled Regional Mineral $\geq 30\%$
- ✓ CO₂ Emission ≤ 250 g/kg
- ✓ VOC Low Emission
- ✓ Recyclable

Areas of application

→ Intended use:

Self-levelling correction of irregular and uneven substrates, with rapid setting and drying, and compensated shrinkage. Thicknesses from 3 to 20 mm.

Compatible adhesives:

- gel adhesives, mineral adhesives, single- and two-component organic mineral adhesives
- reactive-epoxy and polyurethane, single and two-component cement-based adhesives, dispersed in water or solvent solutions.

Covering materials:

- porcelain tiles, ceramic tiles, klinker and cotto of all types and formats
- natural stone, recomposed materials, marble
- plywood parquet floor

Substrates:

- Mineral screeds made with Keracem Eco Pronto, Keracem Eco Prontoplus, Rekord Eco Pronto,

Massetto Premix and Keracem Eco as binder or pre-mixed product

- cement-based screeds
- calcium sulphate-based screeds
- prefabricated concrete or fresh concrete castings
- ceramic floors
- wooden floors
- OSB panels
- gypsum fibre or fibre-cement panels

Internal floors in domestic and commercial applications.

Do not use in external applications, on high flexible substrates subject to thermal expansion, on wet substrates subject to moisture rising; for floating or desolidarizing applications, in environments where water is always present.

Instructions for use

→ Preparation of substrates

The substrate must comply with current technical regulations and national standards.

In general, substrates must be free of dust, oil and grease, free from any moisture rising, with no loose, flaky or imperfectly anchored parts such as residues of cement, lime, paint coatings and adhesives, which must be completely removed. The substrate must be stable, non-deformable, without cracks and have already completed the curing period of hygrometric shrinkage. In particular, substrates must be treated with a suitable primer as shown in the table below:

Substrate	Primers	Dilution with water
Cement-based screeds	Active Prime Fix	Undiluted or diluted
Calcium sulphate-based screeds	Active Prime Fix	Pure
Concretes	Active Prime Fix	Undiluted or diluted
	Active Prime Grip	Pure
Ceramic floors	Active Prime Fix	Pure
	Active Prime Grip	Pure
Timber substrates	Active Prime Fix	Pure
	Active Prime Grip	Pure
Gypsum fibre or fibre-cement panels	Active Prime Fix	Pure
	Active Prime Grip	Pure

→ Preparation

Pour 4.5-5 l of clean water into a clean container; then pour in a bag of Flowtech Easy, while shaking. Mix with a low-rev electric agitator until a smooth, lump-free and self-levelling mixture is obtained. Larger quantities of Flowtech Easy may be prepared in suitable mixers. After the first mixing, it is advisable to leave the mixture to rest for approx. 2 minutes and then mix again briefly. Flowtech Easy features a high degree of self-levelling capacity. Adding extra water does not improve the workability of the product, and may cause shrinkage in the plastic phase of drying and result in less effective final performance with a reduction in surface hardness, compressive strength and adhesion to the substrate.

→ Application

Flowtech Easy is generally applied with a smooth spreader or float. Application with plaster pumps allows the user to very quickly achieve a smooth finish for large areas. It is advisable to press down hard with the trowel during application so as to regulate the absorption of water and obtain maximum adhesion to the substrate. After that, the thickness can be adjusted as required. Use of a lightened, cylindrical-section, levelling bar (in case of high thicknesses) or a specific roller to

Instructions for use

remove air bubbles (in case of low thicknesses) will be required to free the self-levelling product from air bubbles created by high absorbency levels of the substrate and to obtain a smooth and perfectly even surface. If an additional correction layer is required, it must be applied as soon as the previous layer is ready for foot traffic (≈ 3 hrs at $+23$ °C and 50% R.H.) and only after the application of Active Prime Fix eco-friendly adhesion promoter, following the instructions for use. After this time, it is necessary to wait $\approx 5-7$ days, depending on the thickness created, then apply Active Prime Fix and overlay. In the

case of low temperatures and high humidity it is advisable to keep the environment ventilated during application and during the hours immediately following application, in order to avoid the formation of condensation on the surface of the self-levelling product during the setting phase. Protect from air currents at actual floor level.

- **Cleaning**
Residual traces of Flowtech Easy can be removed from tools using water before the product hardens.

Special notes

- **Joints:** allow for expansion around the perimeter, laying the Tapetex Plus or Tapetex Slim compressible tape along the whole perimeter of the room, on the walls and on any other vertical elements protruding from the supporting layer. Large and continuous surface areas need to be fractionized as soon as they can withstand foot traffic so to create areas < 50 m² with 8 m maximum individual size. All the joints located in the substrate must be respected.
- **Inconsistent screeds:** use Keradur Eco to consolidate the screed. Keradur Eco must be spread evenly across the surface to be treated using a brush, roller or sprinkler, checking that it is absorbed totally by the substrate. Apply Active Prime Fix primer the following day.
- **Hardwood floors:** for subsequent laying of hardwood floors, create a smooth finish with

thickness ≥ 5 mm. Always check residual moisture on site with a calcium carbide hygrometer.

- **Underfloor heating systems (hydronic or electric):** for the installation of Flowtech Easy on underfloor heating systems, the self-levelling product must be bonded to a rigid substrate (cement- or anhydrite-based screeds, dry panels, ceramic floors) properly treated with a suitable primer. Flowtech Easy cannot be applied floating or desolidarised. The minimum thickness above the system must be 5 mm, except in cases where the overlying covering requires a greater thickness. After 7 days from the installation of Flowtech Easy, proceed with the initial start-up cycle of the system in accordance with the requirements of standard EN 1264-4.

Certificates and marks



* Émission dans l'air intérieur Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

Technical Data compliant with Kerakoll Quality Standard		
Appearance	Grey pre-mixed	
Apparent volumetric mass	≈ 1.16 kg/dm ³	
Mineralogical nature of inert material	silicate - crystalline carbonate	
Grading	0-1000 µm	
Shelf life	≈ 9 months from the date of production in the original, unopened packaging; protect from humidity	
Mixing water	≈ 4.5-5 l / 1 bag 25 kg	
Specific weight of the mixture	≈ 2.10 kg/dm ³	UNI 7121
Self levelling time	≈ 20 min.	
End setting time	≈ 50-70 min.	
Temperature range for application	from +5 °C to +30 °C	
Maximum thickness	from 3 to 20 mm	
Foot traffic	≈ 3 hrs	
Waiting time before laying:		
- ceramic tiles, porcelain tiles, natural stone	≈ 12 hrs	
- multi-layer parquet	≈ 24 hrs	
Coverage	≈ 1.6 kg/m ² per mm of thickness	

Values taken at +23 °C, 50% R.H. and no ventilation. Data may vary depending on specific conditions at the building site, i.e.temperature, ventilation and absorbcency level of the substrate and of the materials laid.

Performance**VOC Indoor Air Quality (IAQ) - Volatile organic compound emissions**

Conformity	EC 1 Plus GEV-Emicode	Cert. GEV 14281/11.01.02
------------	-----------------------	--------------------------

HIGH-TECH

Adhesion to concrete after 28 days	≈ 2.0 N/mm ²	EN 13892-8
------------------------------------	-------------------------	------------

Resistance to:

- compressive after 24 h	≥ 12 N/mm ²	EN 13892-2
--------------------------	------------------------	------------

- compressive after 7 days	≥ 18 N/mm ²	EN 13892-2
----------------------------	------------------------	------------

- compressive strength after 28 days	≥ 20 N/mm ²	EN 13892-2
--------------------------------------	------------------------	------------

- flexural after 28 days	≥ 6 N/mm ²	EN 13892-2
--------------------------	-----------------------	------------

Dimensional stability	< 0.5 mm/m	EN 13892-9
-----------------------	------------	------------


Classification/ Conformity	CT-C25-F6	EN 13813
----------------------------	-----------	----------

Classification CSTB	P3	QB 213 S 196
---------------------	----	--------------

Values taken at +23 °C, 50% R.H. and no ventilation. Data may vary depending on specific conditions at the building site.

Warning

- Product for professional use
- abide by any standards and national regulations
- Do not use Flowtech Easy to correct substrate irregularities greater than 20 mm
- Do not add other binders, additives or pigments to the mixture
- Low temperatures and high relative humidity lengthen the drying time and can saturate the environment; this may have a negative effect on the quality of the surface of the self-levelling product
- An excessive quantity of water will reduce strength and the drying time
- Protect from direct sunlight and air currents for the first 4 hrs
- respect the elastic joints present in the substrate
- if necessary, ask for the safety data sheet
- for any other issues, contact the Kerakoll Worldwide Global Service +39 0536 811 516 - globalservice@kerakoll.com



The Rating classifications refer to the GreenBuilding Rating Manual 2013. This information was last updated in April 2024 (ref. GBR Data Report – 04.24); please note that additions and/ or amendments may be made over time by KERAKOLL SpA; for the latest version, see www.kerakoll.com. KERAKOLL SpA shall therefore be liable for the validity, accuracy and updating of information provided only when taken directly from its institutional website. The technical data sheet given here is based on our technical and practical knowledge. As it is not possible for us to directly check the conditions in your building yards and the execution of the work, this information represents general indications that do not bind Kerakoll in any way. Therefore, it is advisable to perform a preliminary test to verify the suitability of the product for your purposes.